


8 7 6 5 4 3 2 1

D  
C  
B  
A

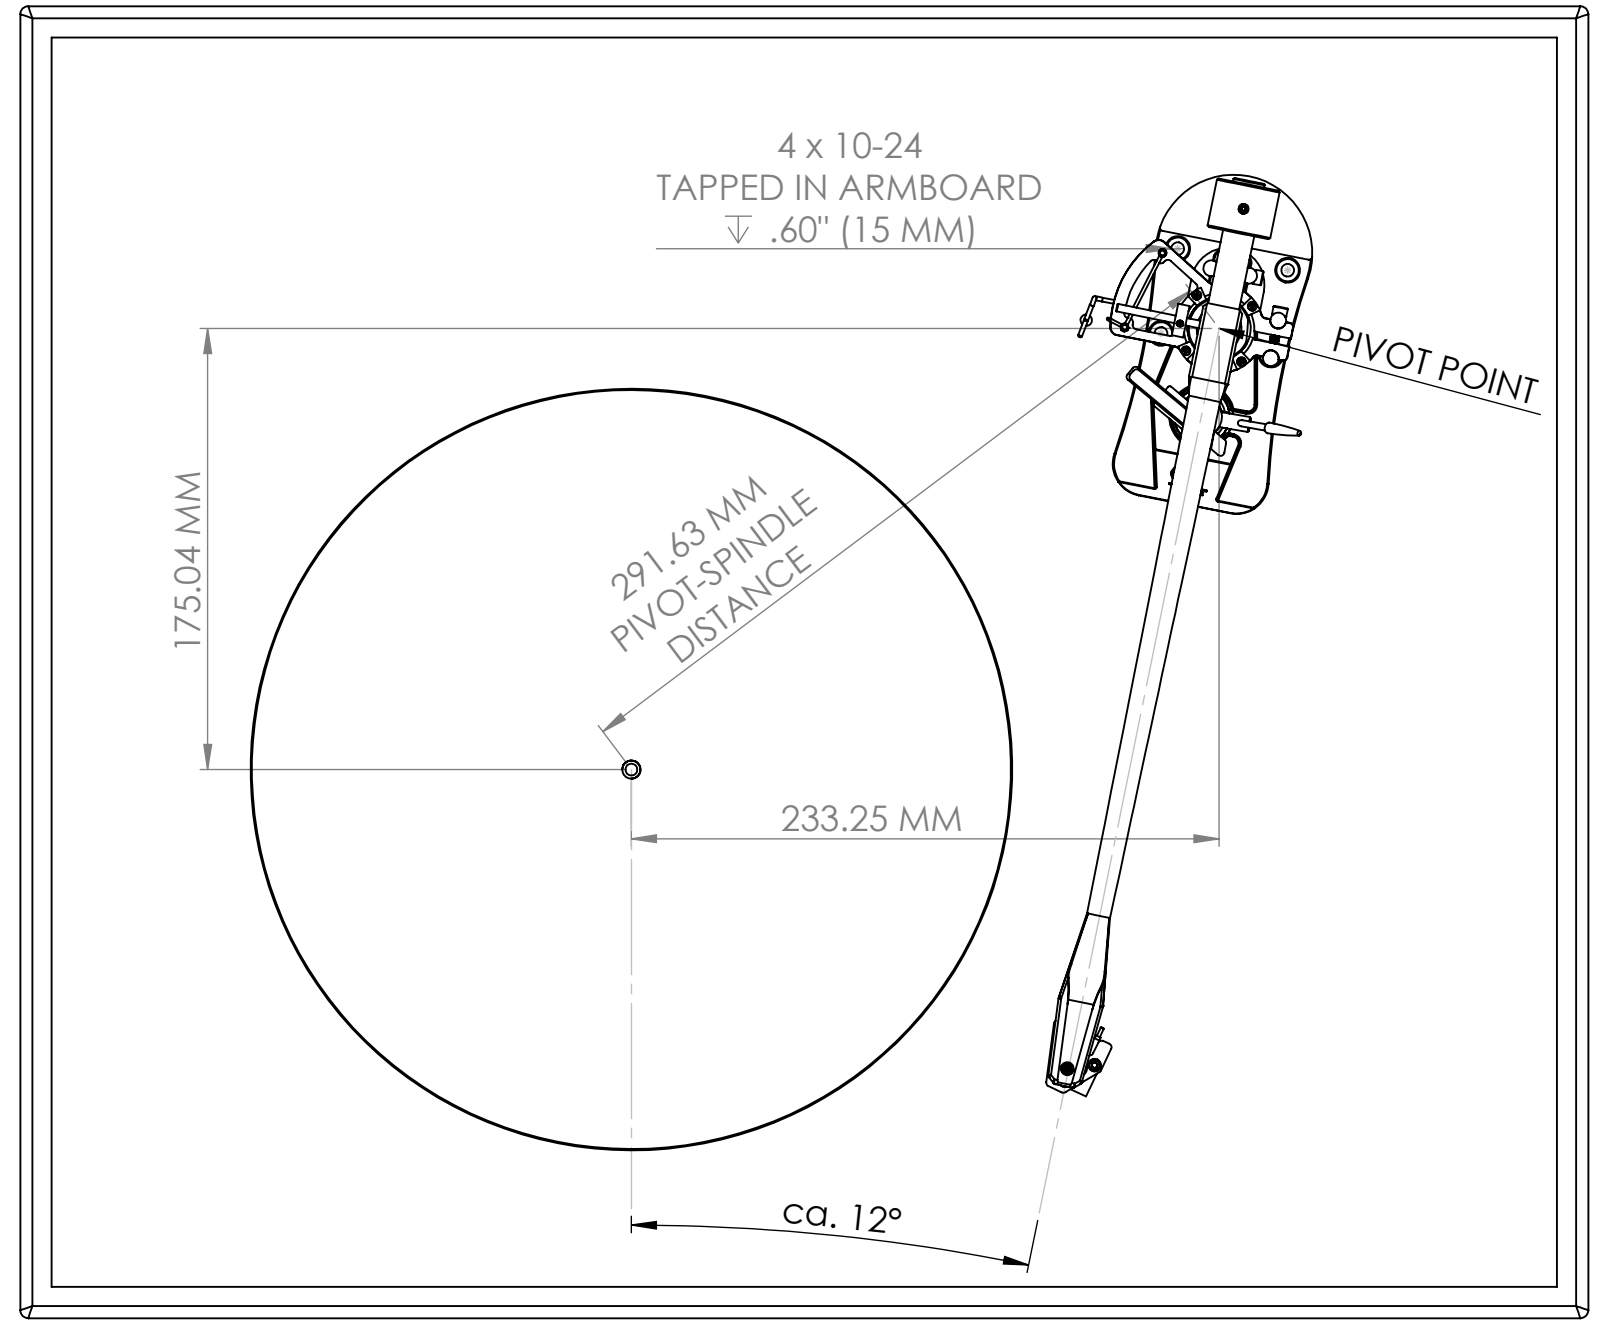

D  
C  
B  
A

4 x 10-24  
TAPPED IN ARMBORD  
∇ .60" (15 MM)

PIVOT POINT

291.63 MM  
PIVOT-SPINDLE  
DISTANCE

175.04 MM

233.25 MM

ca. 12°

COMMENTS:  
ALL DIMENSIONS IN MM, EXCEPT WHERE INDICATED

IF TONEARM POSITION IS MODIFIED, PLEASE ENSURE THAT:  
- PIVOT-SPINDLE DISTANCE REMAINS THE SAME: 291.63 MM  
- ARMWAND CAN COME TO ARM REST CLEAR OF PLATTER  
- ARMWAND DOESN'T RUN OUT OF THE ARM LIFT PLATFORM BEFORE THE END OF THE RECORD

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DURAND TONEARMS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DURAND TONEARMS LLC IS PROHIBITED.

RECOMMENDED DIFFERENCE HEIGHT BETWEEN PLATTER SURFACE AND MOUNTING SURFACE: ca. 28-30 MM  
IF DIFFERENCE IS SMALLER THAN CA. 25 MM, A 1" BLIND HOLE (DEPTH 1") MIGHT NEED TO BE BORED IN MOUNTING SURFACE FOR BEARING COLUMN

	DATE
DRAWN	9 NOV 2011

DURAND TONEARMS LLC

TITLE:  
**TELOS  
ON TURNTABLE**

DO NOT SCALE DRAWING

SIZE <b>B</b>	DWG. NO.	REV
SCALE: 1:5	WEIGHT:	SHEET 1 OF 1

8 7 6 5 4 3 2 1